


Model LF-320

For Tour and Charter Buses

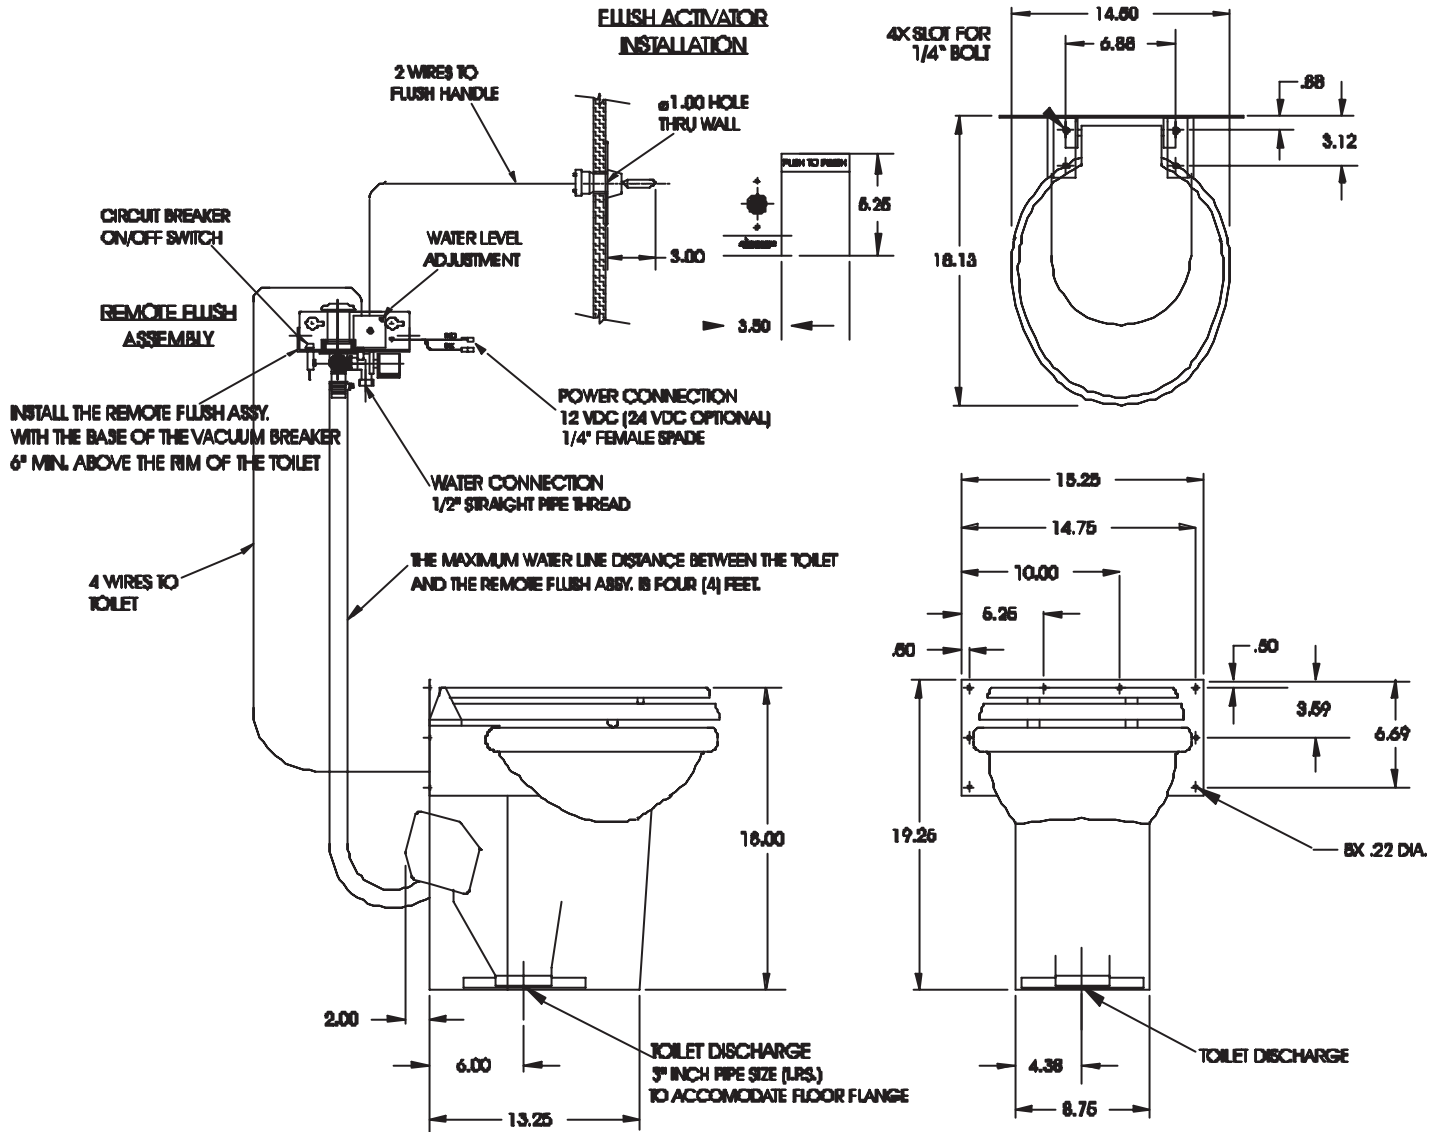

Specifications

Power: 12 / 24 Volt DC
 AMPS: 1.2 Amps / 6 Amps
 Wire Size: Recommended 18 AWG
 Fuse: 5 Amp
 Water Usage: 1/5 Gallon/Flush
 Water Flow at Toilet: 2.5 GPM Min.

Water Pressure
 at Toilet: 20-50 PSI
 Optimal Pressure: 35 PSIG
 Water Supply Line: 1/2" ID Min.
 Water System: Accumulator Tank Recommended
 Connection: 1/2" NPSM
 Discharge: 3 1/2" Downward
 Mounting: Conventional Closet Flange
 Weight: 35 lbs.

**FOR CUSTOMER SERVICE, PLEASE
 CALL TOLL FREE 1-800-358-8280**

Continuing a policy of research and development, Microphor reserves the right of price, product or design change without notice or obligation.



452 East Hill Road
 Willits, CA 95490 USA
 Phone: 707.459.5563
 Toll Free: 800.358.8280

Fax: (707) 459-6617
 E-mail: info@microphor.com
 www.microphor.com
 www.wabtec.com

Form: lf320
 Rev 8/13/01