

NEW

MICROJET MODEL LF-720/750

LOW VOLUME TOILET



MicroJet Stainless Steel Toilets are designed for applications where extra durability and vandal resistance are required. The bead blast finish is easily cleaned and maintained. Optional powder coating in a selection of colors is available. Using 0.80 gallons water per flush, the marine head provides excellent economical benefits, while solving both water supply and sewage disposal problems. The waste is transported completely and efficiently. (Each *MicroJet* Stainless Steel toilet shall be floor mounted and low volume water use type manufactured by Microphor, Willits, California, USA.) The flushing mechanism shall be a push button activated. Water shall be left in the bowl to prevent a “dry bowl” condition when the toilet is not flushing.

GENERAL INFORMATION


Installation of the *MicroJet* Stainless Steel toilet is similar to a conventional toilet and is suitable for replacing either standard fixtures or for use in new construction. The following are general installation requirements. Voltage options are 12 or 24 volt DC.

WATER SUPPLY - Water is to be supplied to the toilet by a reinforced 1” water line with water supply at 45 PSI static and a sustained flow of 15 gpm at 45 PSI minimum.

US Patent number: 7.383.593

SHIPPING INFORMATION - Weight: 35 lbs.

WARRANTY - Detailed warranty available.

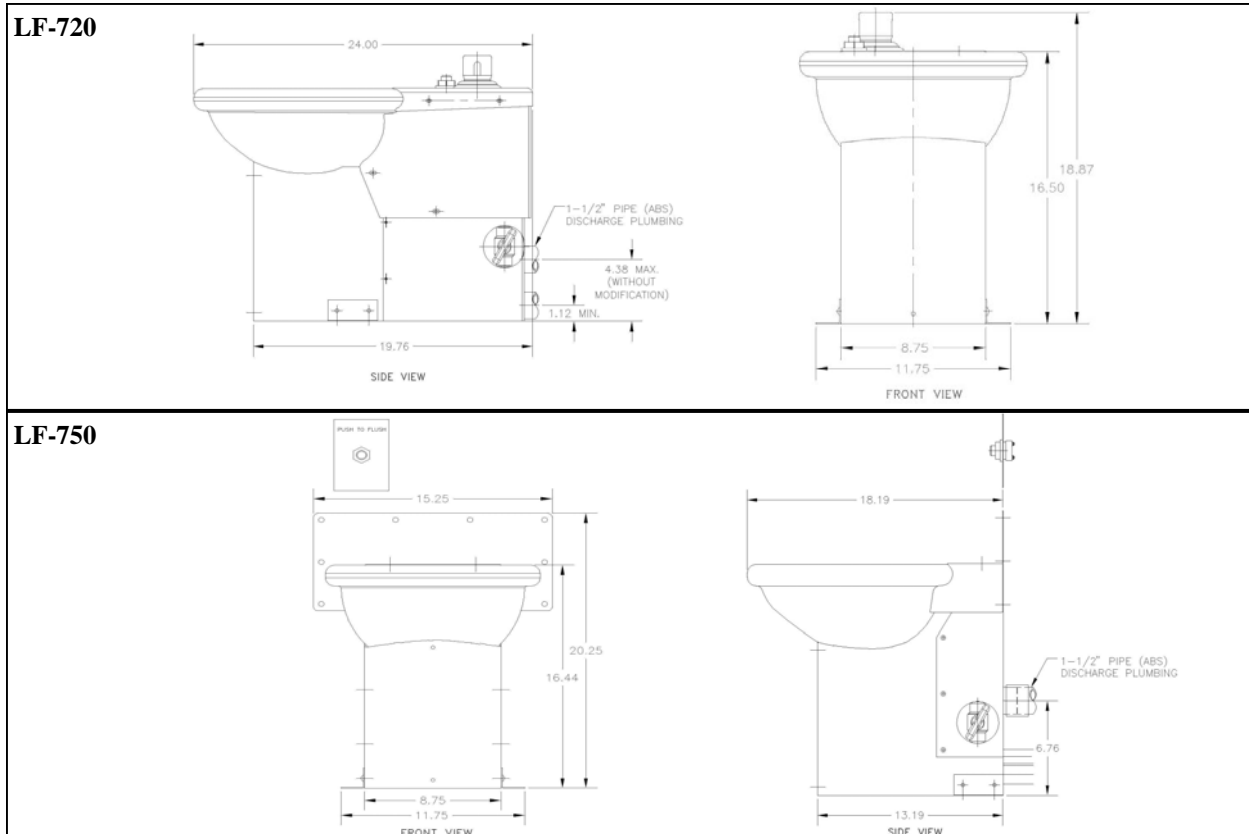

452 East Hill Road, Willits, CA 95490 USA
Tel: 707.459.5563 Tel: 800.358.8280 Fax: 707.459.6617
www.microphor.com www.wabtec.com

LF-720/750 05/28/2009